



# MAGNAVOX MDV2300 Motherboard Replacement

This guide will step you through the moderately easy process of how to replace the motherboard on your Magnavox MDV2300 DVD Player.

Written By: Justin



## INTRODUCTION

To begin this guide please have with you all the required material and components. This guide should not take very long, depending on your skill level.



### TOOLS:

- [Phillips #0 Screwdriver](#) (1)



### PARTS:

- [Magnavox MDV2300 Motherboard](#) (1)

## Step 1 — Motherboard




- Look the device over.
- Make sure the device is unplugged from the wall.

## Step 2




- Remove two screws on top panel.

### Step 3

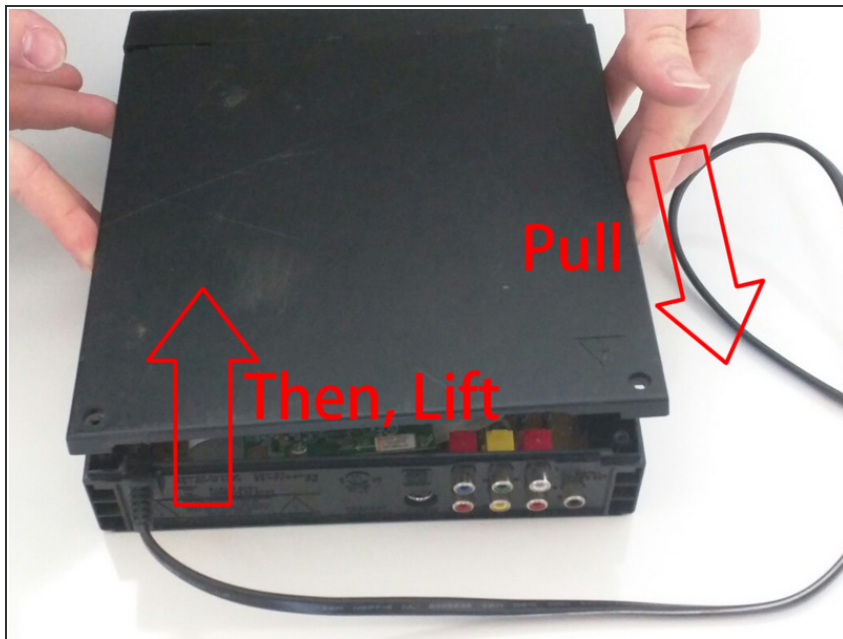

- Take top panel off of device.

### Step 4

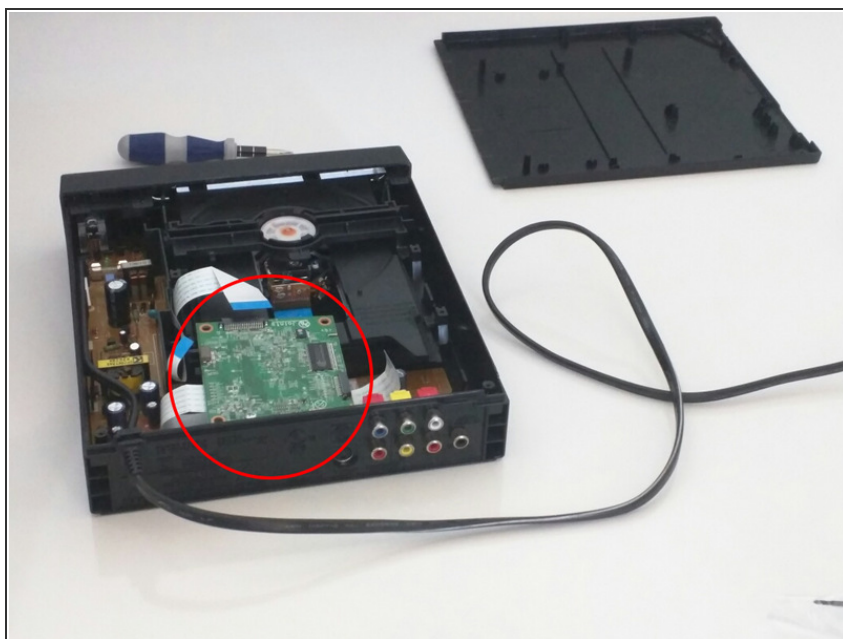


- Identify the mother board.

## Step 5



- Unplug wires from mother board component. Do not be afraid to tug. The wires are strong and should not tear.

## Step 6

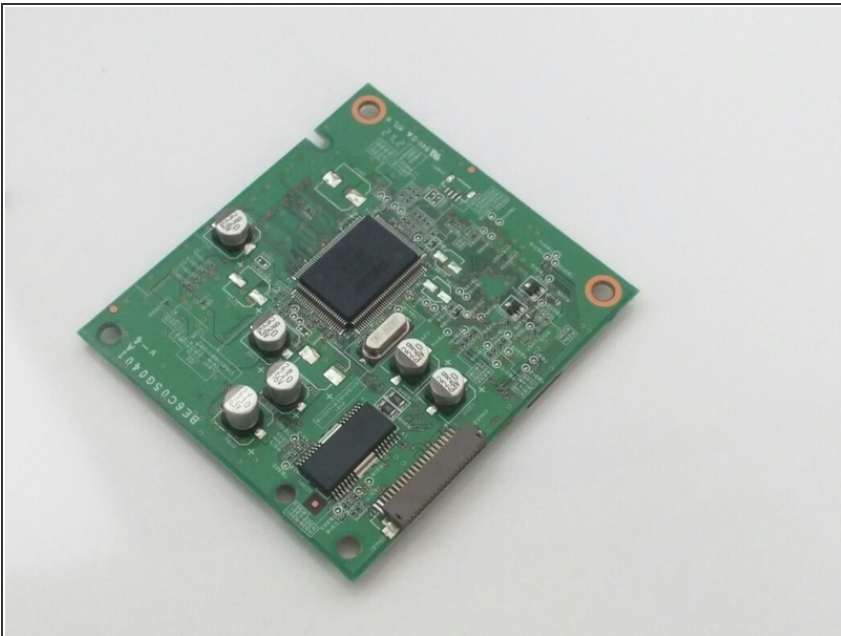

- Buy new mother board.
- When installing motherboard back into device make sure wires are snug in their casings.
- Repeat steps in reverse to put device back together.

To reassemble your device, follow these instructions in reverse order.